

AD-A187 378

DYNAMIC OBSERVERS AS ASYMPTOTIC LIMITS OF RECURSIVE  
FILTERS: SPECIAL CASES(U) MARYLAND UNIV COLLEGE PARK  
J S BARAS ET AL 01 DEC 86 AFOSR-TR-87-1439


1/1


UNCLASSIFIED

N00014-83-K-0731

F/G 12/2

ML

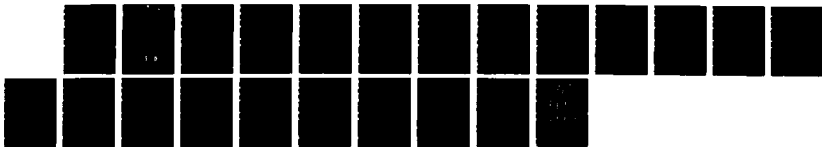

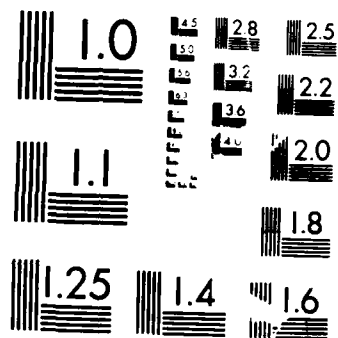

MICROCOPY RESOLUTION TEST CHART  
NATIONAL BUREAU OF STANDARDS-1963-A

AD-A187 578

DTIC FILE COPY

①

SECURITY CLASSIFICATION OF THIS PAGE

## REPORT DOCUMENTATION PAGE

Form Approved  
OMB No. 0704-0188

1a. REPORT SECURITY CLASSIFICATION			1b. RESTRICTIVE MARKINGS					
2a. SECURITY CLASSIFICATION AUTHORITY			3. DISTRIBUTION/AVAILABILITY OF REPORT					
2b. DECLASSIFICATION/DOWNGRADING SCHEDULE			Approved for public release; distribution unlimited.					
4. PERFORMING ORGANIZATION REPORT NUMBER(S)			5. MONITORING ORGANIZATION REPORT NUMBER(S) <b>AFOSR-TR- 87-1439</b>					
6a. NAME OF PERFORMING ORGANIZATION		6b. OFFICE SYMBOL (if applicable)		7a. NAME OF MONITORING ORGANIZATION				
6c. ADDRESS (City, State, and ZIP Code)				7b. ADDRESS (City, State, and ZIP Code)				
8a. NAME OF FUNDING/SPONSORING ORGANIZATION		8b. OFFICE SYMBOL (if applicable)		9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER <b>AFOSR-87-0073</b>				
8c. ADDRESS (City, State, and ZIP Code)				10. SOURCE OF FUNDING NUMBERS				
				PROGRAM ELEMENT NO.		PROJECT NO.	TASK NO.	WORK UNIT ACCESSION NO.
11. TITLE (Include Security Classification)								
12. PERSONAL AUTHOR(S)								
13a. TYPE OF REPORT		13b. TIME COVERED FROM _____ TO _____		14. DATE OF REPORT (Year, Month, Day)		15. PAGE COUNT		
16. SUPPLEMENTARY NOTATION								
17. COSATI CODES			18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number)					
FIELD	GROUP	SUB-GROUP						
19. ABSTRACT (Continue on reverse if necessary and identify by block number)								
<b>DTIC</b> <b>ELECTE</b> <b>NOV 16 1987</b> <b>S H D</b>								
20. DISTRIBUTION/AVAILABILITY OF ABSTRACT <input type="checkbox"/> UNCLASSIFIED/UNLIMITED <input type="checkbox"/> SAME AS RPT <input type="checkbox"/> DTIC USERS				21. ABSTRACT SECURITY CLASSIFICATION				
22a. NAME OF RESPONSIBLE INDIVIDUAL				22b. TELEPHONE (Include Area Code)		22c. OFFICE SYMBOL		

accepted for publication in SIAM J. of Applied Mathematics

AFOSR-TR- 87 - 1 439

# Dynamic Observers as Asymptotic Limits of Recursive Filters: Special Cases<sup>1</sup>

J.S. Baras<sup>2</sup>      A. Bensoussan<sup>3</sup>      M. R. James<sup>4</sup>

December 1, 1986



<sup>1</sup> Research supported in part through NSF Grants CDR-85-00108, INT-84-13793, ONR Grant N00014-83-K-0731, and AFOSR contract AFOSR-870073.

<sup>2</sup> Electrical Engineering Department and Systems Research Center, University of Maryland, College Park, MD, 20742, USA.

<sup>3</sup> Institut National de Recherche en Informatique et en Automatique, Domain de Voluceau, Rocquencourt, B.P. 105, 78153 Le Chesnay Cedex, FRANCE.

<sup>4</sup> Mathematics Department and Systems Research Center, University of Maryland, College Park, MD, 20742, USA.

For	<input checked="" type="checkbox"/>
and	<input type="checkbox"/>
ion	<input type="checkbox"/>
ion/	
lity Codes	
l and/or	
pecial	



87 10 1 345

# 1 Introduction

Our objective is to describe a method for constructing an observer for the dynamical system

$$\begin{aligned}\dot{x}(t) &= f(x(t)) + \sum_{i=1}^m g_i(x(t)) u_i(t), \quad x(0) = x_0, \\ y(t) &= h(x(t)),\end{aligned}\tag{1}$$

as the asymptotic limit of nonlinear filters associated with the "noisy" version of (1):

$$\begin{aligned}dx^\epsilon(t) &= f(x^\epsilon(t)) dt + \sum_{i=1}^m g_i(x^\epsilon(t)) u_i(t) + \sqrt{\epsilon} N(x^\epsilon(t)) dw(t), \\ x^\epsilon(0) &= x_0, \\ d\xi^\epsilon(t) &= h(x^\epsilon(t)) dt + \sqrt{\epsilon} R dv(t), \quad \xi^\epsilon(0) = 0,\end{aligned}\tag{2}$$

with  $\epsilon \rightarrow 0$ . Here  $x(t) \in \mathbb{R}^n$ ,  $y(t) \in \mathbb{R}^p$  as usual. The method is motivated by some large deviation results of Hijab [3], [4] for the conditional measures  $P_{x|\xi}^\epsilon$  of (2).

In the present paper we present results of this general method as applied to the linear case and a certain class of nonlinear systems. The general nonlinear problem will be treated elsewhere.

# 2 Observers for Linear Systems

In this section we provide a complete description of the method as it applies to linear systems. The results are improvements and completions of earlier preliminary accounts provided in [1], [2].

The method constructs explicitly an observer for the linear system

$$\begin{aligned}\dot{x}(t) &= Ax(t) + Bu(t), \quad x(0) = x_0, \\ y(t) &= Cx(t),\end{aligned}\tag{3}$$

as the asymptotic limit of (Kalman) filters for a family of associated filtering problems

$$\begin{aligned}dx^\epsilon(t) &= Ax^\epsilon(t)dt + Bu(t)dt + \sqrt{\epsilon} N dw(t), \quad x^\epsilon(0) = x_0, \\ d\xi^\epsilon(t) &= Cx^\epsilon(t)dt + \sqrt{\epsilon} R dv(t), \quad \xi^\epsilon(0) = 0.\end{aligned}\tag{4}$$

Such a construction is suggested by the fact that for certain choices of  $Q_0^\epsilon = \text{cov}(x_0^\epsilon)$ , the filters are independent of  $\epsilon$ , as discussed in Baras and Krishnaprasad [1]. Also, the solutions of (4) converge in probability as  $\epsilon \rightarrow 0$  to the solution of (3).

The work of Hijab [3], [4] is indispensable here in deriving a large deviation principle for the conditional measures  $P_{x|\xi}^\epsilon$  (see Section 2.3), and identifying the limit of the filters for (4) as an associated deterministic estimator.

## 2.1 Observers and Filters

We assume as usual that  $x(t) \in \mathbb{R}^n$ ,  $u(t) \in \mathbb{R}^m$ ,  $y(t) \in \mathbb{R}^p$ , and  $t \mapsto u(t)$  is piecewise continuous.

Recall that the *observer* problem consists of constructing a dynamical system

$$\dot{m}(t) = Em(t) + Fu(t) + Gy(t), \quad m(0) = m_0, \quad (5)$$

so that the error

$$e(t) = x(t) - Hm(t) \quad (6)$$

decays exponentially fast to zero, at a rate controlled by the designer, independent from the choice of  $m_0$  and  $x_0$ . Here the matrices  $E, F, G$  and  $H$  are possibly time-varying and the dimension of  $m(t)$  is not necessarily  $n$ . This of course reflects the fact that the initial condition  $x_0$  is unknown, and the best that can be done is to approximately estimate  $x(t)$  by  $Hm(t)$  in this way.

Solutions to this problem are well known, first given by Luenberger [6]. In particular, if the pair  $(C, A)$  is *detectable*, then there exists a matrix  $\Gamma$  such that the matrix  $A + \Gamma C$  has eigenvalues in the open left half plane. Then set

$$E = A + \Gamma C, \quad F = B, \quad G = -\Gamma, \quad H = I.$$

In this case the error (6) satisfies

$$\dot{e}(t) = (A + \Gamma C)e(t), \quad e(0) = x_0 - z_0,$$

and the eigenvalues of  $A + \Gamma C$  can be arbitrarily assigned by the designer if and only if  $(C, A)$  is *observable*.

Consider the system (3). Define  $\xi(t) = \int_0^t y(s)ds$ , so that (3) becomes

$$\begin{aligned}\dot{x}(t) &= Ax(t) + Bu(t), \quad x(0) = x_0, \\ \dot{\xi}(t) &= Cx(t), \quad \xi(0) = 0.\end{aligned}\tag{7}$$

Then associate with (7) the family of filtering problems (4), where  $w, v$  are independent standard  $k$ -dimensional, respectively  $p$ -dimensional Brownian motions. The initial condition  $x_0^\epsilon$  is Gaussian, independent from  $v, w$  with  $E(x_0^\epsilon) = \mu_0^\epsilon$ ,  $\text{cov}(x_0^\epsilon) = Q_0^\epsilon$ , where  $Q_0^\epsilon$  is positive definite. Note that the (small) parameter  $\epsilon$  controls the intensity of the noise. The matrix  $R$  is assumed positive definite.

As is well known, the minimum variance estimate  $\hat{x}^\epsilon(t) = E(x(t) | \xi^\epsilon(s), 0 \leq s \leq t)$  for the linear Gaussian filtering problem (4) is given by the Kalman filter [7]

$$\begin{aligned}d\hat{x}^\epsilon(t) &= A\hat{x}^\epsilon(t)dt + Bu(t)dt + Q^\epsilon(t)C'(RR')^{-1}C(d\xi^\epsilon(t) - C\hat{x}^\epsilon(t)dt), \\ \hat{x}^\epsilon(0) &= \mu_0^\epsilon,\end{aligned}\tag{8}$$

where  $Q^\epsilon$  satisfies the Riccati equation

$$\begin{aligned}\dot{Q}^\epsilon(t) &= AQ^\epsilon(t) + Q^\epsilon(t)A' - Q^\epsilon(t)C'(RR')^{-1}CQ^\epsilon(t) + NN', \\ Q^\epsilon(0) &= Q_0^\epsilon/\epsilon.\end{aligned}\tag{9}$$

Note that these filters depend on  $\epsilon$  only via the matrix  $Q_0^\epsilon/\epsilon$ . In fact, if we choose  $Q_0^\epsilon = \epsilon Q_0$ , then all the filters are independent of  $\epsilon$  and identical with the filter for  $\epsilon = 1$ .

Following Hijab [3], it is convenient to consider the filter (8), (9) as a map

$$\begin{aligned}\mathcal{F}^\epsilon : C([0, t], \mathbb{R}^p) &\longrightarrow \mathbb{R}^n, \\ \xi(s), 0 \leq s \leq t &\longmapsto \hat{x}^\epsilon(t).\end{aligned}$$

## 2.2 Deterministic Estimation

Following Mortensen [8] and Hijab [3], we associate with (7) the deterministic (noisy) system

$$\begin{aligned}\dot{z}(t) &= Az(t) + Bu(t) + Nw(t), \quad z(0) = z_0, \\ \dot{\zeta}(t) &= Cz(t) + Rv(t), \quad \zeta(0) = 0,\end{aligned}\tag{10}$$

and energy cost functional

$$J_t(z_0, w, v) = \frac{1}{2} (z_0 - \mu)' Q_0^{-1} (z_0 - \mu) + \frac{1}{2} \int_0^t (w(s)' w(s) + v(s)' v(s)) ds, \quad (11)$$

where  $t \mapsto w(t) \in \mathbb{R}^k$ ,  $t \mapsto v(t) \in \mathbb{R}^p$  are piecewise continuous, the rank of  $N$  is  $n$ , and  $Q_0$  is positive definite.

A minimum energy input triple  $(z_0^*, w^*, v^*)$  given  $\zeta(s)$ ,  $0 \leq s \leq t$ , is a triple that minimises  $J_t$  subject to (10) and produces the given output record  $\zeta(s)$ ,  $0 \leq s \leq t$ . The *deterministic* or minimum energy *estimate* of  $z(t)$  given  $\zeta(s)$ ,  $0 \leq s \leq t$ , is the endpoint  $\hat{z}(t)$  of the trajectory  $z^*(s)$ ,  $0 \leq s \leq t$ , of (10) corresponding to a minimum energy input triple:  $\hat{z}(t) = z^*(t)$ .

According to Krener [9],  $\hat{z}$  is the solution of the Kalman filter equations

$$\begin{aligned} \dot{\hat{z}}(t) &= A\hat{z}(t) + Bu(t) + Q(t)C'(RR')^{-1}(\zeta(t) - C\hat{z}(t)), \\ \hat{z}(0) &= \mu, \end{aligned} \quad (12)$$

$$\begin{aligned} \dot{Q}(t) &= AQ(t) + Q(t)A' - Q(t)C'(RR')^{-1}CQ(t) + NN', \\ Q(0) &= Q_0. \end{aligned} \quad (13)$$

As in the stochastic case (Section 2.1), it is convenient to consider the deterministic filter (12), (13) as a map

$$\begin{aligned} \mathcal{F} : C^1([0, t], \mathbb{R}^p) &\longrightarrow \mathbb{R}^n, \\ \zeta(s), 0 \leq s \leq t &\longmapsto \hat{z}(t). \end{aligned}$$

Note that the deterministic filter coincides with the stochastic filter for  $\epsilon = 1$ , that is,  $\mathcal{F}^1$ . Also,  $\hat{z}(t)$  is obtained from an optimal control problem, and is determined by a Hamilton-Jacobi-Bellman equation [3], [8].

We now prove that as  $\epsilon \rightarrow 0$  the stochastic filter  $\mathcal{F}^\epsilon$  (8), (9) converges to the deterministic filter  $\mathcal{F}$  (12), (13).

**Theorem 1** Suppose that (4) has initial conditions  $x_0^\epsilon$  Gaussian with mean  $\mu'$  and covariance  $Q_0^\epsilon$  satisfying

$$\lim_{\epsilon \rightarrow 0} \frac{1}{\epsilon} Q_0^\epsilon = Q_0,$$

$$\lim_{\epsilon \rightarrow 0} \mu^\epsilon = \mu,$$

where  $Q_0$  is positive definite. Then

$$\lim_{\epsilon \rightarrow 0} E |\hat{x}^\epsilon(t) - \hat{z}(t)|^2 = 0$$

uniformly in  $t \in [0, T]$ .

**Proof:** Now  $Q^\epsilon(t) \rightarrow Q(t)$  uniformly in  $t \in [0, T]$ . Applying Ito's rule to  $|\hat{x}^\epsilon(t) - \hat{z}(t)|^2$  and taking expectations, we find that, given  $\delta > 0$ ,

$$E |\hat{x}^\epsilon(t) - \hat{z}(t)|^2 \leq (|\mu^\epsilon - \mu|^2 + \delta K(1 + |\mu^\epsilon|) + \epsilon K) e^{Kt},$$

for all  $\epsilon$  sufficiently small, where  $K > 0$ . The desired result follows from this inequality.  $\square$

## 2.3 Large Deviations

Consider the stochastic differential equation (4), with initial condition  $x_0^\epsilon = x_0$  for all  $\epsilon > 0$ . In this section we take  $u \equiv 0$ . Let  $P_x^\epsilon$  be the probability measure induced on  $\Omega^n = C([0, T], \mathbb{R}^n)$  by the diffusion  $x^\epsilon$ . It is well known from the theory of Ventcel-Friedlin (see Varadhan [10]) that the family of measures  $P_x^\epsilon$  satisfy a large deviation principle. Moreover, as  $\epsilon \rightarrow 0$ ,  $P_x^\epsilon$  converges weakly to the degenerate measure concentrated on the unique solution  $x$  of (3).

We now consider the observation equation in (4). Let  $Q_{x|(\xi, x_0)}^\epsilon$  be an unnormalised conditional measure on  $\Omega^n$  of  $x^\epsilon$  given  $\xi \in \Omega^p = C([0, T], \mathbb{R}^p)$  where the diffusions are initialised as above. For a "control"  $t \rightarrow w(t)$ , let  $z_w$  denote the unique solution to (10). The function  $v$  is defined by  $R^{-1}(\dot{\xi}(t) - Cz_w(t))$  when  $\xi$  is  $C^1$ . Hijab [4] proved the following large deviation result for  $Q_{x|(\xi, x_0)}^\epsilon$ .

**Theorem 2** For any open subset  $O$  and any closed subset  $C$  of  $\Omega^n$ ,

$$\liminf_{\epsilon \rightarrow 0} \epsilon \log Q_{x|(\xi, x_0)}^\epsilon(O) \geq -I(x_0, \xi, O)$$

$$\limsup_{\epsilon \rightarrow 0} \epsilon \log Q_{x|(\xi, x_0)}^\epsilon(C) \leq -I(x_0, \xi, C)$$

where for  $\mathcal{A} \subset \Omega^n$ ,

$$I(x_0, \xi, \mathcal{A}) = \inf_{\omega} \left\{ \frac{1}{2} \int_0^T (\omega(s)' \omega(s) + z_\omega(s)' C' C z_\omega(s)) ds \right. \\ \left. - \int_0^T z_\omega(s)' C' d\xi(s) \mid z_\omega(0) = x_0, z_\omega \in \mathcal{A} \right\}. \quad (14)$$

**Proof:** Define, for each  $\xi \in \Omega^p, \omega \in \Omega^n$ ,

$$\phi(\omega, \xi) = -\xi(T)' C \omega(T) + \int_0^T \left( \xi(t)' C A \omega(t) + \frac{1}{2} \omega(t)' C' C \omega(t) - \frac{1}{2} \xi(t)' C N N' C' \xi(t) \right) dt.$$

There exist constants  $A, B$  depending only on  $\xi$ , such that

$$-\phi(\omega, \xi) \leq A + B \|\omega\|.$$

Then arguing as in Varadhan [11],

$$\lim_{R \rightarrow \infty} \limsup_{\epsilon \rightarrow 0} \epsilon \log \int_{\{\omega: -\phi(\omega, \xi) \geq R\}} \exp \left( -\frac{1}{\epsilon} \phi(\omega, \xi) \right) dP_z^\epsilon = -\infty.$$

But this estimate is enough to prove the theorem. See Hijab [4] and Varadhan [11] for details.  $\square$

The minimisation in (14) is an optimal control problem similar to the one in Section 2.2, but with fixed initial condition  $x_0$ . James and Baras [13] have made a simple generalisation of Theorem 2 in which the variational problem arising is exactly the optimal control problem for deterministic estimation in Section 2.2.

Assume that the initial conditions  $x_0^\epsilon$  of (4) have (unnormalised) density

$$q^\epsilon(x_0) = \exp \left( -\frac{1}{2\epsilon} (x_0 - \mu)' Q_0^{-1} (x_0 - \mu) \right).$$

Let  $Q_{(x, x_0) | \xi}^\epsilon$  be an unnormalised joint conditional measure of  $(x', x_0')$  on  $\Omega^n \times \mathbb{R}^n$  given  $\xi \in \Omega^p$ . The following result is quoted from [13].

**Theorem 3** For any open subset  $O$  and any closed subset  $C$  of  $\Omega^n$ , and for any open subset  $O_0$  and any closed bounded subset  $C_0$  of  $\mathbb{R}^n$ , we have

$$\begin{aligned}\liminf_{\epsilon \rightarrow 0} \epsilon \log Q_{(x, z_0)|\xi}^\epsilon(O \times O_0) &\geq -J(O \times O_0, \xi) \\ \limsup_{\epsilon \rightarrow 0} \epsilon \log Q_{(x, z_0)|\xi}^\epsilon(C \times C_0) &\leq -J(C \times C_0, \xi)\end{aligned}$$

where for  $A \times A_0 \subset \Omega^n \times \mathbb{R}^n$ ,

$$J(A \times A_0, \xi) = \inf_{z_0 \in A_0} \left\{ \frac{1}{2} (x_0 - \mu)' Q_0^{-1} (x_0 - \mu) + I(x_0, \xi, A) \right\}. \quad (15)$$

This theorem implies that if  $\xi = \zeta$  is an actual output record of the system (10), then as  $\epsilon \rightarrow 0$ ,  $Q_{(x, z_0)|\xi}^\epsilon$  converges weakly to a degenerate measure concentrated on the optimal initial condition  $z_0^*$  and optimal trajectory  $z^*(s)$ ,  $0 \leq s \leq T$  of (10) corresponding to a minimum energy input triple. As pointed out in Section 2.2, the deterministic estimate of the state at time  $T$  is a functional of this optimal path, namely its value at  $T$ :  $\hat{z}(T) = z^*(T)$ .

Thus in a weak sense,  $\hat{x}^\epsilon(T) \rightarrow \hat{z}(T)$ , and the large deviation principle for  $Q_{(x, z_0)|\xi}^\epsilon$  characterises the limiting filter as the deterministic filter.

## 2.4 Observer Design

From Sections 2.2 and 2.3 it is plain that the deterministic estimator (12), (13) is a natural candidate for an observer for the linear system (3). We make the natural assumption that the pair  $(C, A)$  is *detectable*. Recall that  $N$  has rank  $n$  and  $R$  is positive definite. The design parameters are  $Q_0, N, R$  and  $\mu$ .

Then from (12) we define

$$\begin{aligned}\dot{m}(t) &= Am(t) + Bu(t) + Q(t)C'(RR')^{-1}(y(t) - Cm(t)), \\ m(0) &= m_0 = \mu,\end{aligned} \quad (16)$$

where  $Q(t)$  is the solution of the Riccati equation (13). The inverse  $P(t)$  of  $Q(t)$  is the solution of

$$\begin{aligned}\dot{P}(t) &= -P(t)A - A'P(t) - P(t)NN'P(t) + C'(RR')^{-1}C, \\ P(0) &= P_0 = Q_0^{-1}.\end{aligned} \quad (17)$$

Since we are interested in the asymptotic behaviour of  $e(t) = x(t) - m(t)$ , it is important to obtain bounds for  $\|Q(t)\|$ ,  $\|P(t)\|$ . To this end we interpret  $Q(t)$ ,  $P(t)$  in terms of control problems. Write  $H = R^{-1}C$ .

Consider the control problem

$$-\dot{\eta} = A'\eta + H'v, \quad \eta(T) = h, \quad (18)$$

where  $h$  is given and  $v$  is the control. We minimise

$$J_1(v) = \eta(0)'Q_0\eta(0) + \int_0^T (v(t)'v(t) + \eta(t)'NN'\eta(t)) dt. \quad (19)$$

Then the optimal control for (18), (19) is given by the following algorithm. Consider the system of equations:

$$\begin{aligned} \dot{\hat{\lambda}} &= A\hat{\lambda} + NN'\hat{\eta}, \quad \hat{\lambda}(0) = Q_0\hat{\eta}(0), \\ -\dot{\hat{\eta}} &= A'\hat{\eta} - H'H\hat{\lambda}, \quad \hat{\eta}(T) = h. \end{aligned} \quad (20)$$

Then an optimal control is  $\hat{v}(t) = -H\hat{\lambda}(t)$ . Moreover,

$$\min J_1(v) = h'Q(T)h = \hat{\lambda}(T)h. \quad (21)$$

In addition, the following relation holds:

$$\hat{\lambda}(t) = Q(t)\hat{\eta}(t), \quad \text{for all } t, \quad (22)$$

where  $Q(t)$  is the solution of the Riccati equation (13).

Similarly, consider the control problem

$$\dot{\lambda} = A\lambda + Nv, \quad \lambda(T) = h. \quad (23)$$

Again  $h$  is given and  $v$  is the control. We minimise

$$J_2(v) = \lambda(0)'P_0\lambda(0) + \int_0^T (v(t)'v(t) + \lambda(t)'H'H\lambda(t)) dt. \quad (24)$$

The system of necessary conditions is given by

$$\begin{aligned} \dot{\hat{\lambda}} &= A\hat{\lambda} + NN'\hat{\eta}, \quad \hat{\lambda}(T) = h, \\ -\dot{\hat{\eta}} &= A'\hat{\eta} - H'H\hat{\lambda}, \quad \hat{\eta}(0) = P_0\hat{\lambda}(0), \end{aligned} \quad (25)$$

and an optimal control is  $\hat{v}(t) = N'\hat{\eta}(t)$ , with

$$\min J_2(v) = h'P(T)h = \hat{\eta}(T)h, \quad (26)$$

and

$$\hat{\eta}(t) = P(t)\hat{\lambda}(t), \quad \text{for all } t, \quad (27)$$

where  $P(t)$  is the solution of (17).

Since  $R$  is positive definite, in particular nonsingular, the pair  $(H, A)$  is detectable. Thus there exists a matrix  $\Delta$  such that

$$\eta'(A + \Delta H)\eta \leq -\alpha_0 |\eta|^2, \quad \alpha_0 > 0. \quad (28)$$

Also, since  $N$  has rank  $n$ , the pair  $(A, N)$  is controllable, and there exists a matrix  $\Gamma$  such that

$$\lambda'(A + N\Gamma)\lambda \geq \beta_0 |\lambda|^2, \quad \beta_0 > 0. \quad (29)$$

**Theorem 4** *Under the above assumptions, we have:*

$$\|Q(T)\| \leq \left( \|Q_0\| + \frac{\|N\|^2 + \|\Delta\|^2}{2\alpha_0} \right) \equiv q, \quad (30)$$

$$\|P(T)\| \leq \left( \|P_0\| + \frac{\|H\|^2 + \|\Gamma\|^2}{2\beta_0} \right) \equiv p. \quad (31)$$

**Proof:** Consider in (18) a feedback control

$$v(t) = \Delta'\eta(t).$$

The corresponding state is the solution of

$$-\dot{\eta} = (A' + H'\Delta')\eta, \quad \eta(T) = h. \quad (32)$$

Therefore

$$h'Q(T)h \leq \eta(0)'Q_0\eta(0) + \int_0^T \eta(t)'(NN' + \Delta\Delta')\eta(t)dt. \quad (33)$$

From (32) it follows that

$$|\eta(0)|^2 - 2 \int_0^T \eta(t)' (NN' + \Lambda\Lambda') \eta(t) dt = |h|^2,$$

and from (28) we deduce that  $|\eta(0)|^2 \leq |h|^2$  and

$$\int_0^T |\eta(t)|^2 dt \leq \frac{|h|^2}{2\alpha_0}.$$

Therefore from (33) it follows that

$$h'Q(T)h \leq h' \left( \|Q_0\| + \frac{\|N\|^2 + \|\Lambda\|^2}{2\alpha_0} \right) h$$

which proves (30).

Next, consider in (23) the feedback control

$$v(t) = \Gamma\lambda(t).$$

Then

$$\dot{\lambda} = (A + N\Gamma)\lambda, \quad \lambda(T) = h, \quad (34)$$

and we have

$$h'P(T)h \leq \lambda(0)'P_0\lambda(0) + \int_0^T \lambda(t)'(\Gamma'\Gamma + H'H)\lambda(t)dt. \quad (35)$$

Using (29) and (34) it follows that

$$|h|^2 \geq |\lambda(0)|^2 + 2\beta_0 \int_0^T |\lambda(t)|^2 dt,$$

and hence

$$\int_0^T |\lambda(t)|^2 dt \leq \frac{|h|^2}{2\beta_0}.$$

This together with (35) yields (31).  $\square$

**Remark** This theorem is true if  $\text{rank} N < n$ , provided that  $(A, N)$  is controllable.

## 2.5 Convergence of the Linear Observer

We now use the bounds (30), (31) to prove the following.

**Theorem 5** *The dynamical system (16), (13) is an observer for the linear control system (3) provided that  $(C, A)$  is detectable and the above assumptions hold. That is, there exists constants  $K > 0$ ,  $\gamma > 0$  such that*

$$\|x(t) - m(t)\| \leq K \|x_0 - m_0\| e^{-\gamma t}$$

for all  $t > 0$ .

**Proof:** From (30), (31) it follows that

$$\|P(t)\lambda\| \geq \frac{\|\lambda\|}{q} \quad (36)$$

and

$$\frac{\|\lambda\|^2}{q} \leq \lambda' P(t) \lambda \leq p \|\lambda\|^2. \quad (37)$$

Now  $e(t) = x(t) - m(t)$  satisfies

$$\dot{e}(t) = (A - Q(t)H'H) e(t).$$

Using (17), (36) we deduce

$$\begin{aligned} \frac{d}{dt} e(t)' P(t) e(t) &= -e(t)' (P(t) N N' P(t) + H'H) e(t) \\ &\leq -e(t)' P(t) N N' P(t) e(t) \\ &\leq -\frac{r_0}{q^2} \|e(t)\|^2, \end{aligned}$$

where  $NN' \geq r_0 I$ ,  $r_0 > 0$ . This together with (37) implies

$$\frac{d}{dt} e(t)' P(t) e(t) \leq -\frac{r_0}{pq^2} e(t)' P(t) e(t).$$

Set  $\gamma = r_0/2pq^2$ . Therefore

$$e(t)' P(t) e(t) \leq e(0)' P_0 e(0) e^{-2\gamma t}$$

and

$$\|e(t)\|^2 \leq qe(0)'P_0e(0)e^{-2\gamma t}$$

from which the desired result follows.  $\square$

Finally, we state the following result which is a consequence of standard facts concerning the Riccati equation (13).

**Theorem 6** *Given the linear system (3), where  $(C, A)$  is detectable, an  $n \times m$  matrix  $N$  such that  $(A, N)$  is stabilisable, and a positive definite matrix  $R$ , then there exists a unique non-negative definite solution  $\bar{Q}$  to the algebraic Riccati equation*

$$A\bar{Q} + \bar{Q}A' - \bar{Q}C'(RR')^{-1}C\bar{Q} + NN' = 0,$$

*the matrix  $A - \bar{Q}C'(RR')^{-1}C$  is exponentially stable, and the system*

$$\begin{aligned}\dot{m}(t) &= Am(t) + Bu(t) + \bar{Q}C'(RR')^{-1}(y(t) - Cm(t)), \\ m(0) &= m_0,\end{aligned}$$

*is a time-invariant observer for the given system.*

### 3 Observers for Nonlinear Systems

We consider a nonlinear dynamical system with linear observations:

$$\begin{aligned}\dot{x}(t) &= f(x(t)), \quad x(0) = x_0, \\ y(t) &= Cx(t).\end{aligned}\tag{38}$$

We assume that  $f : \mathbb{R}^n \rightarrow \mathbb{R}^n$  is smooth with bounded derivatives, and write

$$A(x) = Df(x)$$

for the  $n \times n$  matrix of first derivatives. Set

$$\|A\| = \sup_{x \in \mathbb{R}^n} \|A(x)\|.$$

### 3.1 Observer Design

Motivated by the linear design, we construct an observer for (38) as an approximation to the corresponding deterministic estimator. Associate with (38) the system

$$\begin{aligned}\dot{z}(t) &= f(z(t)) + Nw(t), \quad z(0) = z_0, \\ \dot{\zeta}(t) &= Cz(t) + Rv(t), \quad \zeta(0) = 0,\end{aligned}\tag{39}$$

where  $\text{rank } N = n$ ,  $R$  is positive definite, and the energy functional

$$J_t(z_0, w, v) = \frac{1}{2}(z_0 - \mu)' P_0(z_0 - \mu) + \frac{1}{2} \int_0^t (w(s)' w(s) + v(s)' v(s)) ds, \tag{40}$$

where  $P_0$  is positive definite.

According to Hijab [3], the deterministic estimate  $\hat{z}$  is the solution of

$$\begin{aligned}\dot{\hat{z}}(t) &= f(\hat{z}(t)) + Q(t)C'(RR')^{-1}(\dot{\zeta}(t) - C\hat{z}(t)), \\ \hat{z}(0) &= \mu,\end{aligned}\tag{41}$$

where

$$Q(t)^{-1} = D^2 S(\hat{z}(t), t),$$

and  $S(z, t)$  is the solution of the Hamilton-Jacobi-Bellman equation

$$\frac{\partial}{\partial t} S(z, t) + H(z, t, DS(z, t)) = 0, \tag{42}$$

$$S(z, 0) = \frac{1}{2}(z_0 - \mu)' P_0(z_0 - \mu),$$

where

$$H(z, t, \alpha) = \alpha f(z) + \frac{1}{2} \alpha N N' \alpha' - \frac{1}{2} z' C' (R R')^{-1} C z + \dot{\zeta}(t)' C z.$$

In the linear case the solution of (42) is a quadratic form and  $Q(t) = P(t)^{-1}$  satisfies a Riccati equation. However, in the general nonlinear case, solutions are not smooth and must be interpreted in the viscosity sense. Thus (41) is not well defined in the large. We seek therefore to approximate  $S(z, t)$  by a quadratic form, and replace the Hamilton-Jacobi equation (42)

by a simpler Riccati equation. In this way we will obtain a well defined observer. Write  $H = R^{-1}C$ .

Suppose that  $S$  is smooth in a neighbourhood of  $(\mu, 0)$ . Denoting components by superscripts and partial derivatives by subscripts, and using the summation convention, for small  $t$  we have at  $(\hat{z}(t), t)$ :

$$\begin{aligned} \frac{d}{dt} S_{ij}(\hat{z}(t), t) = & S_{ijk} \dot{\hat{z}}^k - S_{kij} f^k - 2S_{ki} f_j^k \\ & - S_{ki}(NN')^{kl} S_{lj} + (H'H)^{ij}, \end{aligned}$$

using the fact that  $S_k(\hat{z}(t), t) = 0$  from the definition of  $\hat{z}(t)$ . If  $S$  were quadratic, the third order terms vanish. This suggests that we replace (41) by

$$\begin{aligned} \dot{m}(t) &= f(m(t)) + Q(t)C'(RR')^{-1}(y(t) - Cm(t)), \\ m(0) &= m_0 = \mu, \end{aligned} \quad (43)$$

where now  $Q(t) = P(t)^{-1}$ , and  $P(t)$  satisfies the Riccati equation

$$\begin{aligned} \dot{P}(t) &= -P(t)A(m(t)) - A(m(t))'P(t) - P(t)NN'P(t) + H'H, \\ P(0) &= P_0. \end{aligned} \quad (44)$$

Also  $Q(t)$  is the solution of

$$\begin{aligned} \dot{Q}(t) &= A(m(t))'Q(t) + Q(t)A(m(t)) - Q(t)H'HQ(t) + NN', \\ Q(0) &= Q_0 = P_0^{-1}. \end{aligned} \quad (45)$$

Once again it is important to obtain bounds for  $\|Q(t)\|$ ,  $\|P(t)\|$ . To recover estimates similar to (30), (31), we assume that the pair  $(H, A(x))$  is *uniformly detectable*, that is, there exists a bounded Borel matrix valued function  $\Delta(x)$  such that

$$\eta'(A(x) + \Delta(x)H)\eta \leq -\alpha_0 |\eta|^2, \quad \alpha_0 > 0, \quad (46)$$

for all  $x \in \mathbb{R}^n$ . Since  $N$  has rank  $n$  and  $\|A\| < \infty$ , the pair  $(A(x), N)$  is *uniformly controllable*, and thus there exists a bounded Borel  $\Gamma(x)$  such that

$$\lambda'(A(x) + N\Gamma(x))\lambda \geq \beta_0 |\lambda|^2, \quad \beta_0 > 0, \quad (47)$$

for all  $x \in \mathbb{R}^n$ . Set

$$\| \Delta \| = \sup_{x \in \mathbb{R}^n} \| \Delta(x) \|, \quad \| \Gamma \| = \sup_{x \in \mathbb{R}^n} \| \Gamma(x) \|.$$

Then using the methods of Section 2.4, the following generalisation of Theorem 4 can be proven.

**Theorem 7** *Under the above assumptions, we have:*

$$\| Q(T) \| \leq \left( \| Q_0 \| + \frac{\| N \|^2 + \| \Delta \|^2}{2\alpha_0} \right) \equiv q, \quad (48)$$

$$\| P(T) \| \leq \left( \| P_0 \| + \frac{\| H \|^2 + \| \Gamma \|^2}{2\beta_0} \right) \equiv p. \quad (49)$$

### 3.2 Asymptotic Convergence

We wish to prove that the system (43), (45) is an observer for the nonlinear system (38). This is possible provided that we can bound the region where the initial condition lies and provided the second derivative of  $f$  is not too large.

Consider  $DA(x) = D^2f(x)$ . For any  $x$ ,  $D^2f(x) \in L(\mathbb{R}^n, L(\mathbb{R}^n, \mathbb{R}^n))$  and we denote  $\| D^2f \|$  the supremum over  $x$  of the norm of the linear operator  $D^2f(x)$ .

Note that the numbers  $p$  and  $q$  defined by (48), (49) are functions of the design parameters  $P_0$ ,  $N$ , and  $R$ ; and the given data  $f$  and  $C$ . The designer is free to choose the parameters within the stated constraints. Also  $NN' \geq r_0 I$  for some  $r_0 > 0$ . Define

$$\varphi(P_0, N, R) = \frac{r_0}{q^2 p^{1/2} \| P_0^{1/2} \|.} \quad (50)$$

**Theorem 8** *Assume that*

$$\| x_0 - m_0 \| \| D^2f \| < \max_{P_0, N, R} \varphi(P_0, N, R). \quad (51)$$

Then the dynamical system (43), (45) is an observer for the nonlinear system (38) provided that  $(C, A(x))$  is uniformly detectable and the above assumptions hold. That is, there exists constants  $K > 0$ ,  $\gamma > 0$  such that

$$|x(t) - m(t)| \leq K |x_0 - m_0| e^{-\gamma t}$$

for all  $t > 0$ .

**Proof:** Now  $e(t) = x(t) - m(t)$  satisfies

$$\dot{e}(t) = f(x(t)) - f(m(t)) - Q(t)H'He(t).$$

From (44) we deduce

$$\begin{aligned} \frac{d}{dt} e(t)' P(t) e(t) &= -e(t)' (P(t)NN'P(t) + H'H) e(t) \\ &\quad + 2e(t)' P(t) (f(x(t)) - f(m(t)) - Q(t)H'He(t)) \\ &= -e(t)' (P(t)NN'P(t) + H'H) e(t) \\ &\quad + 2e(t)' P(t) \int_0^1 \int_0^1 r D^2 f(m(t) + rsx(t)) e(t)^2 dr ds \\ &\leq e(t)' \left( -\frac{r_0}{q^2} + |P^{1/2}(t)e(t)| p^{1/2} \|D^2 f\| \right) e(t). \end{aligned} \quad (52)$$

$$(53)$$

By the assumption (51) we can find  $P_0, N, R$  such that

$$|e(0)| \|D^2 f\| < \varphi(P_0, N, R),$$

hence

$$|P_0^{1/2} e(0)| \|D^2 f\| < \frac{r_0}{q^2 p^{1/2}},$$

or

$$-\frac{r_0}{q^2} + |P_0^{1/2} e(0)| p^{1/2} \|D^2 f\| < 0.$$

Since  $P^{1/2}(t)e(t)$  is continuous, there exists an interval  $[0, t_0)$  such that

$$-\frac{r_0}{q^2} + |P^{1/2}(t)e(t)| p^{1/2} \|D^2 f\| < 0,$$

on  $[0, t_0)$ . But from (53),

$$\frac{d}{dt} |P^{1/2}(t)e(t)| < 0$$

on  $[0, t_0)$ , and thus

$$| P^{1/2}(t)e(t) | \leq | P_0^{1/2}e(0) |$$

on  $[0, t_0)$ . By continuity we have

$$| P^{1/2}(t_0)e(t_0) | \leq | P_0^{1/2}e(0) |,$$

and we can proceed from  $t_0$  on. Therefore in fact

$$| P^{1/2}(t)e(t) | \leq \frac{1}{p^{1/2} \| D^2 f \|} \left( \frac{r_0}{q^2} - \delta \right), \quad \delta > 0,$$

for all  $t > 0$ , and (53) implies

$$\frac{d}{dt} e(t)' P(t) e(t) \leq -\delta | e(t) |^2.$$

But from (49),

$$e(t)' P(t) e(t) \leq \| P(t) \| | e(t) |^2 \leq p | e(t) |^2,$$

hence

$$\frac{d}{dt} e(t)' P(t) e(t) \leq -\frac{\delta}{p} e(t)' P(t) e(t)$$

which implies

$$e(t)' P(t) e(t) \leq e(0)' P_0 e(0) e^{-\frac{\delta}{p} t}.$$

Therefore, using (48),

$$\begin{aligned} | e(t) |^2 &\leq \| Q(t) \| e(t)' P(t) e(t) \\ &\leq q e(t)' P(t) e(t) \\ &\leq q e(0)' P_0 e(0) e^{-\frac{\delta}{p} t}, \end{aligned}$$

from which we deduce the desired result.  $\square$

**Remark** It follows from (52) that if the design parameters  $P_0, N, R$  were chosen so that

$$0 < \delta \equiv \frac{r_0}{q^2} - p \| A \|,$$

then the assumption (51) is unnecessary. Then (43), (45) is an observer for (38) independent of the initial conditions. Unfortunately this inequality is at best difficult to achieve.

## References

- [1] J. S. Baras and P. S. Krishnaprasad, *Dynamic Observers as Asymptotic Limits of Recursive Filters*, IEEE Proc. 21st CDC, Orlando, Florida, Dec., 1982.
- [2] J. S. Baras and M. R. James, *Dynamic Observers as Asymptotic Limits of Recursive Filters: Linear Case*, Technical Report TR-86-19, Systems Research Center, University of Maryland, April 1986.
- [3] O. Hijab, *Minimum Energy Estimation*, PhD Dissertation, University of California, Berkely, December, 1980.
- [4] O. Hijab, *Asymptotic Bayesian Estimation of a First Order Equation with Small Diffusion*, Annals of Probability, 12, pp890-902, 1984.
- [5] V. E. Beneš, *Exact Finite-Dimensional Filters for Certain Diffusions with Nonlinear Drift*, Stochastics, Vol. 5, pp65-92, 1981.
- [6] D. G. Luenberger, *Observers for Multivariable Systems*, IEEE Trans. Aut. Control, Vol. AC-11, pp190-199, 1966.
- [7] M. H. A. Davis, *Linear Estimation and Stochastic Control*, London, Chapman and Hall, 1977.
- [8] R. E. Mortensen, *Maximum-Likelihood Recursive Nonlinear Filtering*, J. Opt. Theory and Appl., Vol. 2, No. 6, pp386-394, 1968.
- [9] A. J. Krener, *Minimum Covariance, Minimax and Minimum Energy Estimators*, in *Stochastic Control Theory and Stochastic Differential systems*, M. Kohlmann and W. Vogel (eds.), Berlin, Springer-Verlag, 1979.
- [10] S. R. S. Varadhan, *Large Deviations and Applications*, CBMS-NSF Regional Conf. Series in Appl. Math., Philadelphia, SIAM, 1984.
- [11] S. R. S. Varadhan, *Asymptotic Probabilities and Differential Equations*, Comm. Pure and Appl. Math, Vol. 19, pp261-286, 1966.

- [12] R. Azencott, *Grandes Deviations et Applications*, Lecture Notes in Math., No. 774, Springer-Verlag, 1978.
- [13] M. R. James and J. S. Baras, *Nonlinear Filtering and Large Deviations: A PDE-Control Theoretic Approach*, in preparation.

END

FEB.

1988

DTic